

Rycon Can Cable Belting




Rydell Industrial (Belting) Co stock and supply high quality can cable belting used in the transportation and manufacture of aluminium cans.

Our Rycon Can Cable belt is used around the world and is renowned for its high quality construction using the finest polyesters to give it long service life under all conditions.



Specifications

Polyester TPE 63D silver/natural smooth, reinforced Polyester

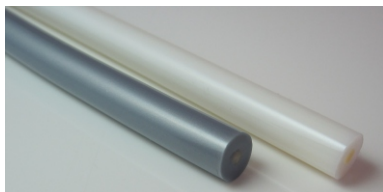

Diameter mm		Cross section	Weight	Standard Roll	Pulley Dia	Working Tension/Belt
Belt	Core	cm ²	kg/100 m	m (ft)	mm	daN/Belt
9.5	3.0	0.710	8.5	150 (500)	150	46.2

63 Shore D
approx. 100 Shore A FDA/ USDA- approved

- Recommended pretension 1-2%
- Working tension approx. 65 daN/cm²
- Reinforced core/ Breaking tension: 3mm= 350 daN

Coefficient of Friction

- Steel approx. 0.35
- PE approx. 0.15
- HDPE approx. 0.10

BEHAbelt

SAMPLE PRESENTATION

www.rydell.com.au