


Rycon RRR23 UHMW-PE Extruded Profile



If you are in the business of building conveyors for plastic modular belting, then there is a good chance that you use UHMW-PE to support the belt and provide a low friction carryway, for the belt to run on.

Rycon RRR23 UHMW-PE extruded profile is a tough, wear resistant plastic that combines an incredibly low co-efficient of friction, with hard wearing anti-abrasive properties. This self lubricating polymer has excellent chemical resistance and a broad temperature range, making it the perfect choice for engineers constructing conveyors for plastic modular belting.

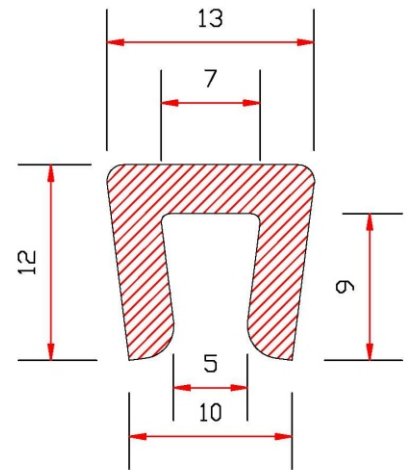

Ask your nearest branch for a quote

Physical Properties

Part Number	RRR23
Description	UHMW-PE, FDA/USDA approved
Color	Opaque white
Co-Efficient of friction at 22C on steel	Static 0.15 to 0.20 Dynamic 0.10 to 0.20
Hardness at 22C	Shore D 62-66
Melting Point	138 deg C

www.rydell.com.au

VICTORIA

NEW SOUTH WALES
QUEENSLAND
SOUTH AUSTRALIA
WESTERN AUSTRALIA

HEAD OFFICE 148-150 Cochrane Road Moorabbin 3189 Victoria
BRANCH Factory 16/24 Kanowna Street Hastings 3915 Victoria
BRANCH 22 Binney Road Kings Park 2148 New South Wales
BRANCH 12 Machinery Street Darra 4076 Queensland
BRANCH 17-19 Churchill Road North Dry Creek 5094 Sth Aust
BRANCH Unit 3/75 Crocker Drive Malaga 6090 West Aust

Phone (03) 9555 7922
Phone (03) 5979 4447
Phone (02) 9831 7300
Phone (07) 3375 6211
Phone (08) 8162 9922
Phone (08) 9249 3777

Fax (03) 9553 3908
Fax (03) 5979 4205
Fax (02) 9831 8822
Fax (07) 3375 6042
Fax (08) 8162 9933
Fax (08) 9249 3778

Email: salesvic@rydell.com.au
Email: salesnsw@rydell.com.au
Email: salesqld@rydell.com.au
Email: salessa@rydell.com.au
Email: saleswa@rydell.com.au